

39-HIWA-PG63

PG-63

42-50

71

28







77

适用电缆  
Cable Range (mm)

螺纹外径  
Thread O. D AG (mm)

螺纹长度  
Thread Length GL (mm)

扳手直径  
Spanner Size (mm)

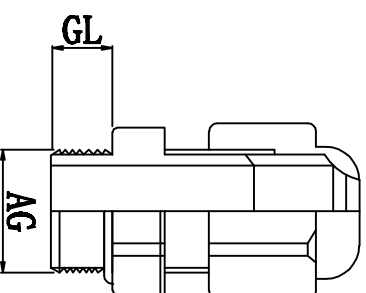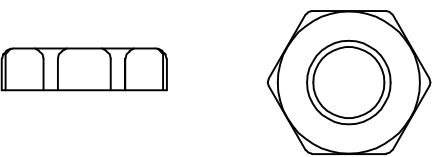

螺帽

本体 夹紧爪

迫紧头

材质: UL尼龙66, 防火等级94V-2, 夹紧圈为橡胶材质  
 特点: 夹紧圈经特殊设计, 拉力强, 对电机不造成损伤  
 用途: 一般机械控制箱、配电盘、机器、电器等电缆固定用  
 防护等级: IP68  
 环境温度: 静态: -40° C, 至+100° C, 短时至+120° C  
 动态: -20° C, 至+80° C, 短时至+120° C



DIMENSION	TOLERANCES				
0.0 0.00	±1.0				
FIRST ANGLE PROJ		A	NEW PART	sullivan	zy.wong 2012/08
		LTR.	REVISION RECORD	DWG. BY	CHK. BY
					DATE
DWG. BY	liu	UNIT	mm		
CHK. BY	sqnigan	REV.	A		
APP. BY	wang zhijun	DWG. NO.	HIWA/QR-JZ-39-HIWA-PG63		

HIWA 惠华 苏州惠华电子科技有限公司