


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	包装 packing	相关认证
31-HIWA-GT-120I	束线带S	GT-120I	120	3.6	30	18.2		

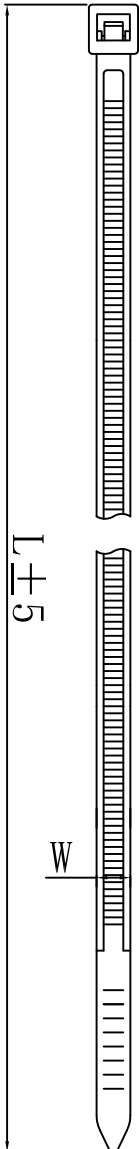

材质: 采用UL认证材料66, 防火等级94V-2, 耐磨,

耐酸碱, 绝缘性好, 不变形, 承受力强.

温度: 可达85℃.

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿  
无封洞, 无气泡



DIMENSION		TOLERANCES															
	0.0 0.00		±0.2														
FIRST ANGLE PROJ				A	NEW PART							DWG. BY		CHK. BY		DATE	
				LTR.	REVISION RECORD							DWG. BY <i>wullivan</i>		CHK. BY <i>zy wang</i>		DATE <i>2008</i>	
DWG. BY		CHK. BY		APP. BY		REV.		UNIT		REV.		DWG. NO.		REV.		DATE	
<i>Lin liang</i>		<i>wullivan</i>		<i>wang zhiyuan</i>		A		mm		A		HIWA/OR-JZ-31-HIWA-120I					

未经授权不得修改和复印  
该知识产权属于技术质量部