


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	包装 packing	相关认证
31-HIWA-GT-280I	束线带S	GT-280I	280	3.6	69	18.2		

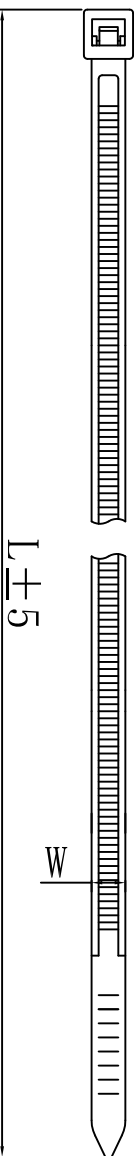

材质: 采用UL认证材料66, 额定电压94V-2, 阻燃, 耐酸碱, 绝缘性好, 不老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION		TOLERANCES		DATE		DATE	
0.0		±0.2				2008	
0.00							
FIRST ANGLE PROJ				2008			
				2008			
A		NEW PART		2008			
LTR.		REVISION RECORD		2008			
		DWG. BY		2008			
		CHK. BY		2008			
		DATE		2008			
DWG. BY		CHK. BY		APP. BY		DWG. NO.	
Lin Liang		yu wang		wang zhiyan		HIWA/QR-JZ-31-HIWA-280I	
CHK. BY		DATE		REV.		UNIT	
yu wang		2008		A		mm	

未经授权不得修改和复印
该知识产权属于技术质量部

惠州惠华电子科技有限公司