


|                  |                  |                |                     |                    |                       |                                 |               |      |
|------------------|------------------|----------------|---------------------|--------------------|-----------------------|---------------------------------|---------------|------|
| 料号<br>Part NO.   | 品名<br>Parts Name | 型号<br>Part NO. | Approx. Length (mm) | Approx. Width (mm) | Max. Bundle Dia. (mm) | Min. Loop Tensile Strenght (kg) | 包装<br>packing | 相关认证 |
| 31-HIWA-GT-200HD | 束线带S             | GT-200HD       | 200                 | 7.6                | 33                    | 54.4                            |               |      |

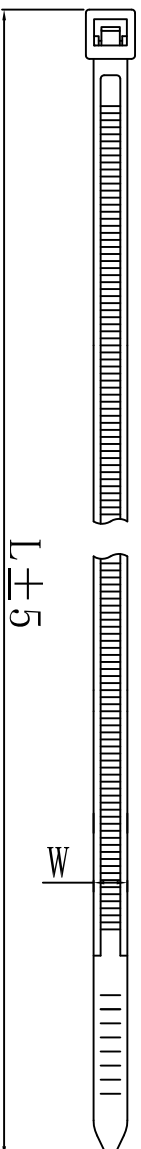

材质: 采用UL认证材料66, 额定电压94V-2, 耐酸、耐碱、绝缘性好, 不老化, 承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿  
无封洞, 无气泡



| DIMENSION        | TOLERANCES | REVISION RECORD |          |         |         | DATE | DWG. NO.       |             |          |                          |
|------------------|------------|-----------------|----------|---------|---------|------|----------------|-------------|----------|--------------------------|
|                  |            | LTR.            | NEW PART | DWG. BY | CHK. BY |      | CHK. BY        | REV.        | UNIT     |                          |
| 0.0              | ±0.2       | A               |          |         |         |      | DWG. BY        | Lin Liang   | UNIT     | mm                       |
| 0.00             |            |                 |          |         |         |      | CHK. BY        | William     | REV.     | A                        |
| FIRST ANGLE PROJ |            |                 |          |         |         |      | APP. BY        | wang ziyuan | DWG. NO. | HIWA/OR-JZ-31-HIWA-200HD |
|                  |            |                 |          |         |         |      | 惠华苏州惠华电子科技有限公司 |             |          |                          |

未经授权不得修改和复印  
该知识产权属于技术质量部