


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)
31-C08-GTL-300ST	双孔束线带	GTL-300ST	300±5	4.8	a: $\phi 72$ b: $\phi 70$	a: $\phi 2.5$ b: $\phi 2.0$	22.2

L±5



双孔束线带可在一次操作中形成两个回圈  
 双控束线带可同时安装两股平行线束，而不需要多使用另一一条尼龙束线带  
 材质：尼龙66，阻燃等级UL94V-2  
 颜色：本色

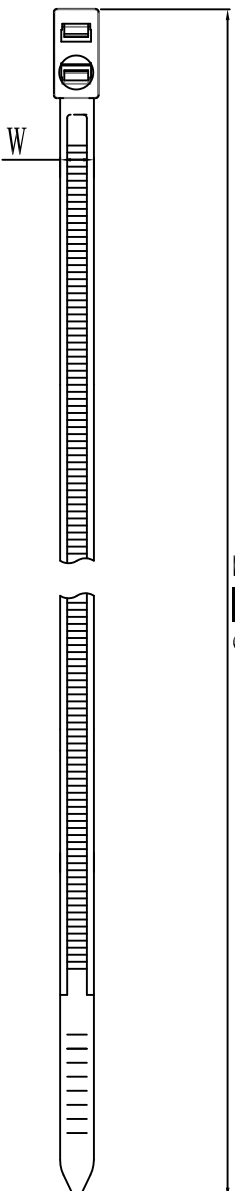

DIMENSION	TOLERANCES				
0.0 0.00	±0.30				
FIRST ANGLE PROJ		A	NEW PART		
		LTR.	REVISION RECORD	DWG. BY	CHK. BY
				<i>allucian</i>	<i>34 wang</i>
					<i>2024/05</i>
DWG. BY	<i>liu liang</i>	UNIT	mm		
CHK. BY	<i>allucian</i>	REV.	A		
APP. BY	<i>wang zhiyan</i>	DWG. NO.	H1W/A/OR-JZ-31-C08-GTL-300ST		



SUZHOU HUIHUA ELECTRICS TECH CO., LTD

未经授权不得修改和复印  
 该知识产权属于技术质量部