



| 料号<br>Part NO. | 品名<br>Parts Name | 型号<br>Part NO. | 尺寸Dimension |        |        |        |        | 备注 |
|----------------|------------------|----------------|-------------|--------|--------|--------|--------|----|
|                |                  |                | A (mm)      | B (mm) | C (mm) | D (mm) | E (mm) |    |
| 69-TW-10       | 电晶体垫片            | TW-10          | 10.0        | 5.0    | 4.0    | 4.0    | 1.0    |    |

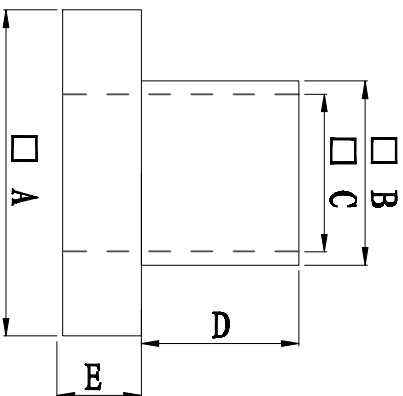

- ◆ MATERIAL: PA66 V2/PBT/  
PA46/PPS/PA66 V0
  - ◆ COLOR: NATURAL
  - ◆ UNIT: mm
- 用途: 锁于电晶体上,  
避免晶体外壳与散热片间造成短路。



未经许可不得修改和复印  
该知识产权属于技术质量部

| DIMENSION        | TOLERANCES      | FIRST ANGLE PROJ    |                 |          |                     |      |
|------------------|-----------------|---------------------|-----------------|----------|---------------------|------|
|                  |                 | A                   | NEW PART        | DWG. BY  | CHK. BY             | DATE |
| 0.0              | ± 0.3           | LTR.                | REVISION RECORD |          |                     |      |
| 0.00             |                 |                     |                 |          |                     |      |
| DWG. BY          | CHK. BY         | APP. BY             | DWG. NO.        | UNIT     | mm                  |      |
| <i>liu liang</i> | <i>caulicau</i> | <i>wang shiyuan</i> |                 | REV.     | A                   |      |
|                  |                 |                     |                 | DWG. NO. | HIMA/OR-JZ-69-TW-10 |      |