
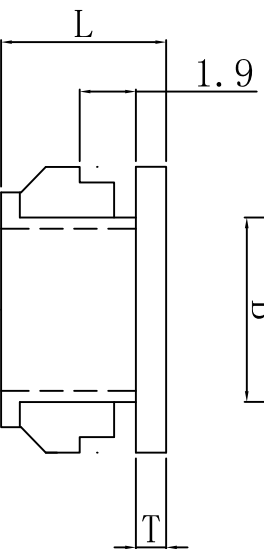


料号 Part NO.	品名 Parts Name	型号 Part NO.	铁板孔径 mounting hold A (mm)	内径 inside diameter B (mm)	覆盖 head diameter C (mm)	高度 height D (mm)	厚度 T (mm)	相关认证
27-SB-22S	扣式护线套	SB-22S	22.2	19.6	24.0	6.5	1.5	

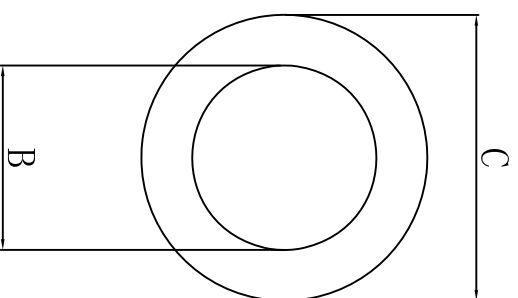

材质：符合UL94-2要求的尼龙66；
用途：使粗劣的铁孔变成圆滑的出线孔，各种电线电缆之保护及绝缘；
用法：不需工具，只要用手轻轻一压，即可完成装配
公差：±0.3mm

DIMENSION	TOLERANCES		NEW PART	DWG. BY	CHK. BY	DATE	DWG. BY	UNIT	mm
	0.0	±0.30					CHK. BY	REV.	
0.00				<i>allian</i>	<i>zy. wang</i>	<i>2009/08</i>	<i>liu liang</i>		
FRIST ANGLE PROJ				<i>allian</i>	<i>zy. wang</i>	<i>2009/08</i>	<i>allian</i>		
							<i>wang shiyuan</i>		A
									HIWA/OR-JZ-27-SB-22S

未经许可不得修改和复印
该知识产权属于技术质量部