


|             |          |      |     |     |  |
|-------------|----------|------|-----|-----|--|
| 34-30*6-1.5 |          |      |     |     |  |
|             | 规格       | A    | B   | C   |  |
|             | 30*6-1.5 | 30.0 | 6.0 | 1.5 |  |



材质: 尼龙66 (UL)  
 阻燃等级: 94V-2  
 颜色: 本色  
 用途: 作为零件之垫片  
 单位: 毫米

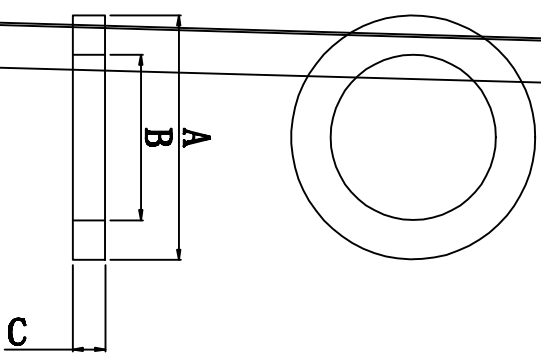

| DIMENSION        | TOLERANCES |      |          |         |         |      |  | DWG. BY   | UNIT          | mm        |
|------------------|------------|------|----------|---------|---------|------|--|-----------|---------------|-----------|
| 0.0              | ±0.15      |      |          |         |         |      |  | liu liang |               |           |
| 0.00             |            |      |          |         |         |      |  | Sullivan  | REV.          | A         |
| FRIST ANGLE PROJ |            | A    | NEW PART |         |         |      |  | DWG. NO.  | HIMA/QR-JZ-34 |           |
|                  |            | LTR. | REVISION | DWG. BY | CHEK BY | DATE |  | APP. BY   | ZY wang       | -30*6-1.5 |
|                  |            |      | RECORDED |         |         |      |  |           |               |           |