



料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (N)	适用螺丝
31-E25-ZT-106 (M6)	固定式束线带	ZT-106 (M6)	160	4.7	35	200.0	6mm

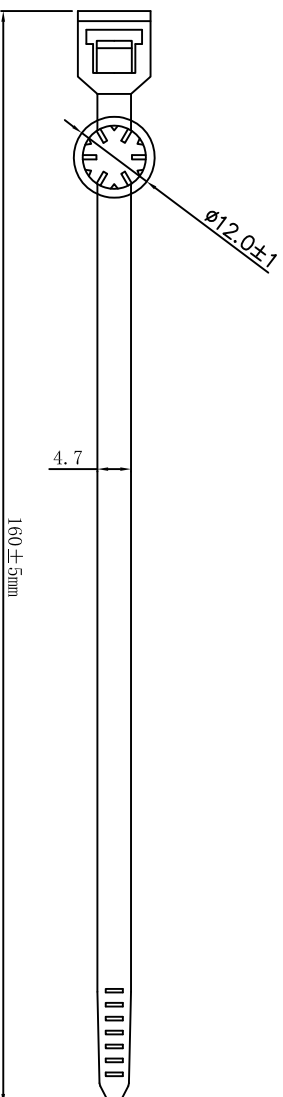

材质：采用UL认证尼龙66，防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不宜老化、承受力强。  
 温度：可达85℃。  
 颜色：黑色；

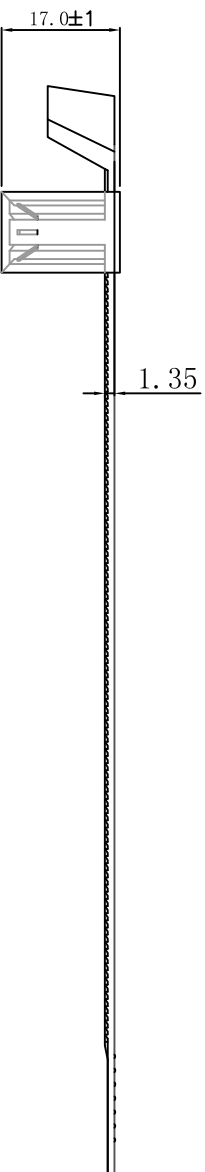

DIMENSION		TOLERANCES		REVISION RECORD		DATE				
0.0	±0.2	A1	产品规格变更 原规格:1-05 变更号:1-06(00)	calculated	zy wang	2021.4.14	DWG. BY	lin liang	UNIT	mm
0.00							CHK. BY	wullivan	REV.	A1
FIRST ANGLE PROJ		A	NEW PART	calculated	zy wang	2019.11.04	APP. BY	wang zhiyan	DWG. NO.	HWA/QR-JZ-31-E25-ZT-106 (M6)
		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	苏州惠华电子科技有限公司			

未经授权不得修改和复印  
 该知识产权属于技术质量部