



料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (N)	适用螺丝
31-E25-Z1-105 (M5)	固定式束线带	Z1-105 (M5)	160	4.7	35	200.0	5mm

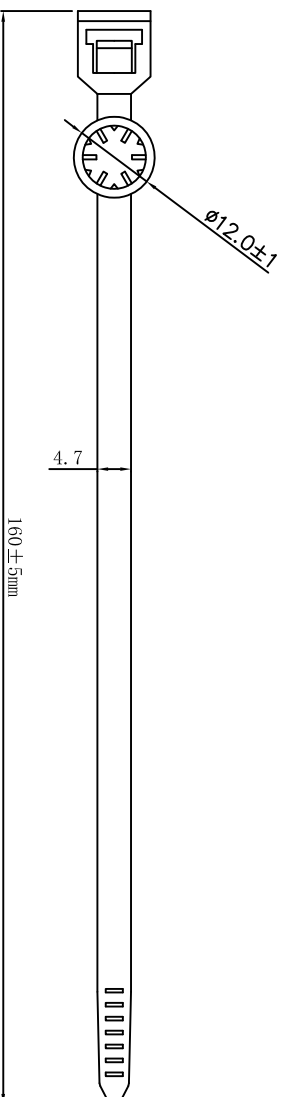

材质：采用UL认证尼龙66，防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不宜老化、承
受力强。
温度：可达85℃。
颜色：黑色；

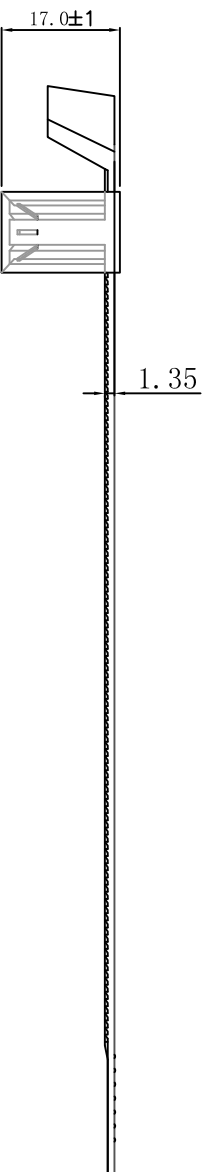

DIMENSION	TOLERANCES					DWG. BY	CHK. BY	UNIT	mm
0.0	±0.2	A1	产品名称变更 原型号=105 变更后=105(M5)	caishiwat	zy wang	2021.4.14	liu liang	REV.	A1
0.00		A	NEW PART	william	zy wang	2019.11.04	wang zhiyan	DWG. NO.	HWA/QR-JZ- 31-E25-Z1-105 (M5)
FIRST ANGLE PROJ		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	APP. BY		
							wang zhiyan		

未经授权不得修改和复印
该知识产权属于技术质量部